




DRIVESHAFT AND BEARINGS MANUFACTURE C...

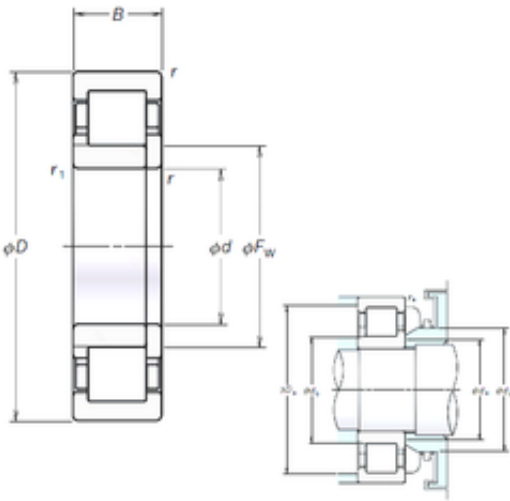

190 mm x 400 mm x 132 mm NSK NUP2338EM cylindrical roller bearings

Bearing No. NUP2338EM

NUP2338EM Bearing 2D drawings and 3D CAD models

Size	190x400x132 mm
Bore Diameter	190 mm
Outer Diameter	400 mm
Width	132 mm
d	190 mm
Fw	240 mm
D	400 mm
B	132 mm
C	132 mm
r min.	5 mm
r1 min.	5 mm
da min.	210 mm
Da max.	380 mm
db max.	235 mm
db min	210 mm
ra max.	4 mm
rb max.	4 mm
S	6,2 mm
Db max	380 mm
Weight	86,2 Kg
Basic dynamic load rating (C)	1770 kN
Basic static load rating (C0)	2520 kN
(Grease) Lubrication Speed	1300 r/min
hidYobi	NUP2338EM
LangID	1



DRIVESHAFT AND BEARINGS MANUFACTURE C...

D_	400
Macha rpm	2000
B_	132
hidTable	ecat_NSCLDR
Oil rpm	1600
rb	4
mass	88.1
GRS rpm	1300
ra	4
db max	235
TSR rpm	1400
C0	2520
DE_	352
Prod_Type3	CRB_SR_NUP
da	210
DA_	56
Z_	14
D_a max	380
yobi	NUP2338EM
dd min	268
C_conv	1770000
ALPHA_	0
SDM_	296
r	5
dc min	248
KBRG	4165
SBRG	23
r1	5
DI_	240